



Terminal F1

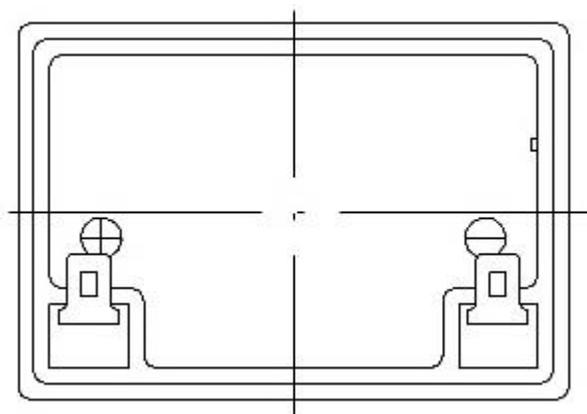


F.V/TIME	5min	10min	15min	30min	60min	2h	3h	4h	5h	10h	20h
9.60V	9.50	6.00	4.75	2.65	1.63	0.89	0.64	0.51	0.43	0.24	0.13
9.90V	9.22	5.82	4.64	2.60	1.60	0.88	0.63	0.51	0.43	0.24	0.13
10.2V	8.84	5.58	4.47	2.52	1.56	0.88	0.63	0.50	0.43	0.23	0.13
10.5V	8.46	5.34	4.31	2.46	1.53	0.86	0.63	0.50	0.43	0.23	0.13
10.8V	7.98	5.04	4.09	2.37	1.48	0.84	0.61	0.49	0.41	0.23	0.12

F.V/TIME	5min	10min	15min	30min	60min	2h	3h	4h	5h	10h	20h
9.60V	106	67.7	54.2	30.4	18.8	10.4	7.57	6.07	5.18	2.83	1.52
9.90V	103	65.6	52.9	29.8	18.5	10.3	7.53	6.04	5.15	2.82	1.52
10.2V	98.6	62.9	50.9	28.9	18.1	10.2	7.48	6.00	5.11	2.81	1.51
10.5V	94.4	60.2	49.2	28.2	17.7	10.1	7.43	5.96	5.07	2.79	1.50
10.8V	89.1	56.9	46.6	27.1	17.2	9.83	7.20	5.78	4.92	2.73	1.47


Discharge Characteristics

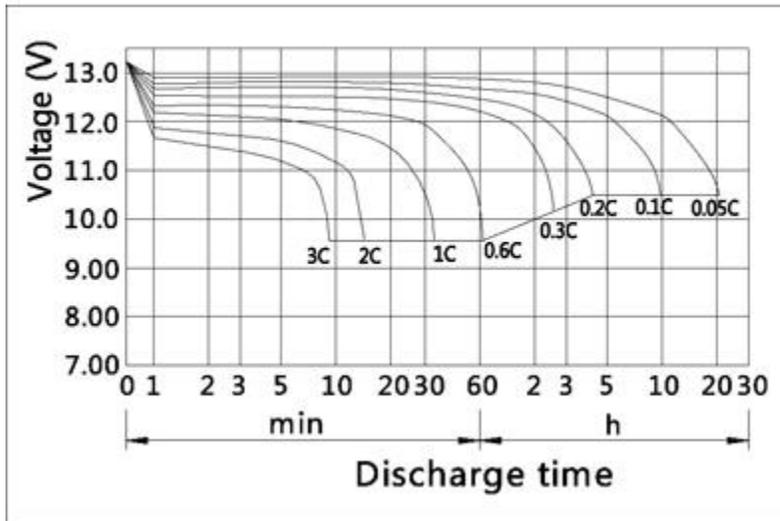


Charging Characteristics

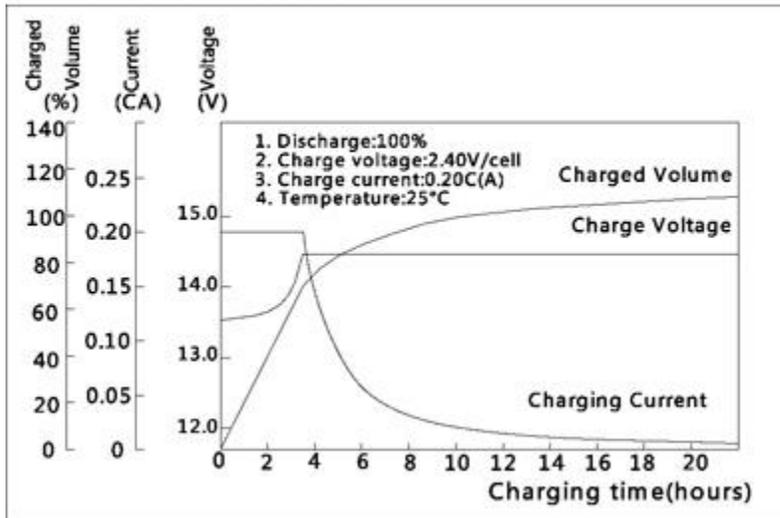


Effect of Temperature on Capacity

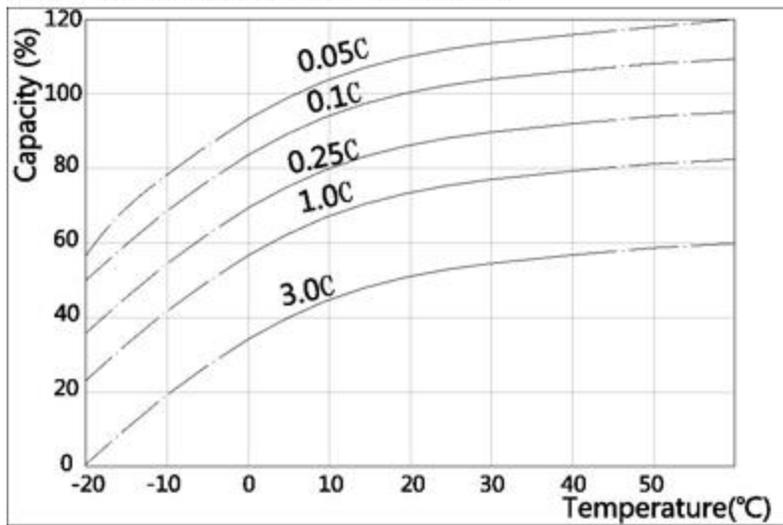


Self-discharge Characteristics

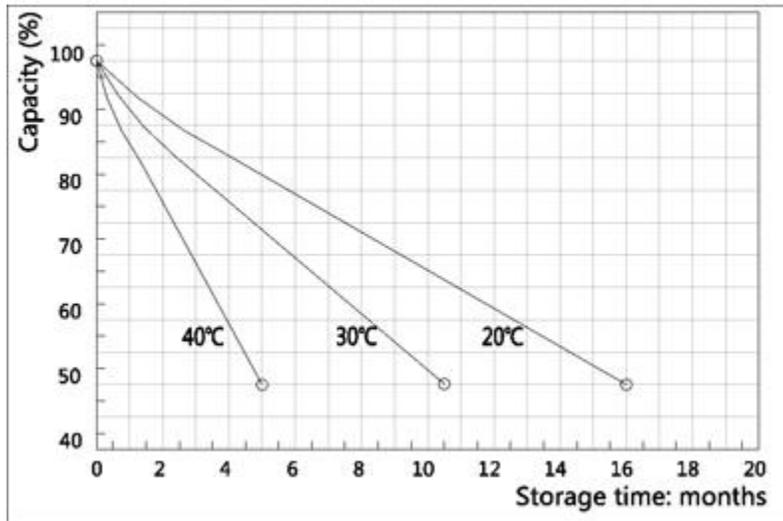


The Relationship for Open Circuit Voltage and Residual Capacity

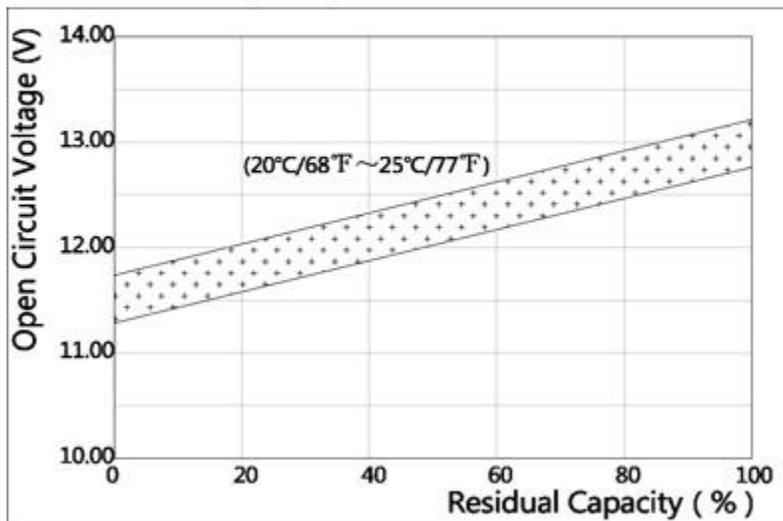

The Relationship for Charging Voltage and Temperature

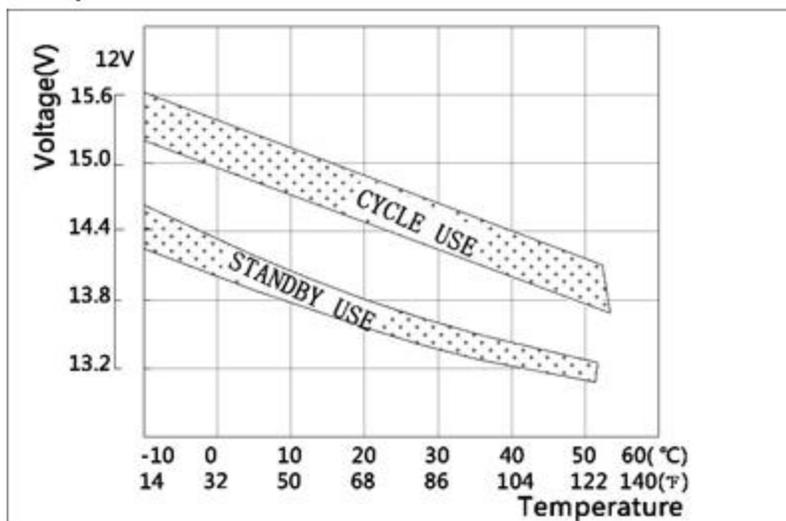

Floating Life on Temperature

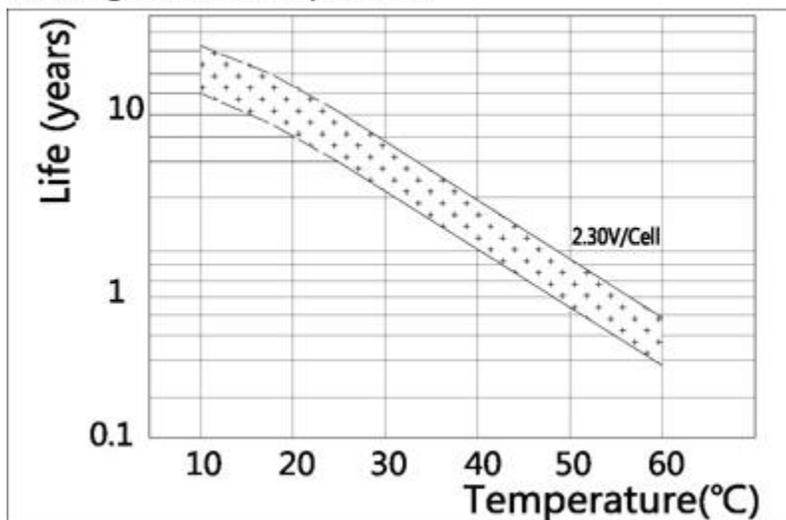

Cycle Life on D.O.D.

